


KLM-LSZH

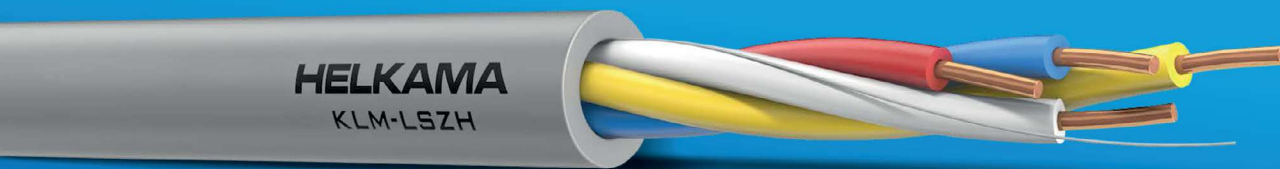

CONDUCTOR	Solid copper conductor Ø 0,8 mm
INSULATION	Solid PE
CONDUCTOR IDENTIFICATION	1. Blue 2. Yellow 3. White 4. Red
DRAIN WIRE	Solid, tinned copper Ø 0,8±0,05 mm
SHIELDING	Aluminium foil
SHEATH	LSZH Rip cord under sheath

PHYSICAL PROPERTIES:

RATED TEMPERATURE	70 °C
OPERATING TEMPERATURE RANGE	-5 °C - 70 °C
BENDING RADIUS	Installation 8 x outer diameter

ELECTRICAL PROPERTIES:

VOLTAGE	75 V
MAX. CONDUCTOR DC RESISTANCE	38.6 Ω/km @20 °C
INSULATION RESISTANCE	min. 5000 MΩ x km @20 °C
DIELECTRIC STRENGTH	AC 1kV/min
FIRE PERFORMANCE	Euroclass Dca, IEC 60332-1
IDENTIFICATION	Printed on the sheath: Manufacturer's name, Cable size and type, Fire performance, Lot number, Manufacturing date, Meter marking
PACKAGING	150 m box, 600 m drum

TYPE:

KLM-LSZH 2X0,8 + 0,8	
OUTER DIAMETER	3,8±0,3
CABLE WEIGHT	19 kg/km
ITEM NUMBER, GREY COLOUR	
150 M BOX	3400225020
600 M DRUM	3402225020
KLM-LSZH 4X0,8 + 0,8	
OUTER DIAMETER	4.4±0.3 mm
CABLE WEIGHT	32 kg/km
ITEM NUMBER, GREY COLOUR	
150 M BOX	3400225040
600 M DRUM	3402225040