


CAT 7 PUR

S/FTP 4 PR AWG 26/7

DATA CABLES

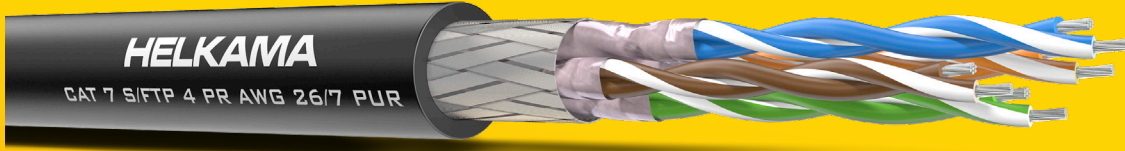

CONDUCTOR	Stranded tinned copper conductor 26 AWG/7
INSULATION	Foam PE
PAIR SHIELDING	Aluminium foil
SHIELDING	Tinned copper wire braid
SHEATH	Polyurethane compound
REFERENCE STANDARD	IEC 61156-6

APPLICATION

Good mechanical characteristics, high tensile strength, resistant to UV, abrasion, chemicals, oil and other fluids. Mud resistant according to NEK606.

PHYSICAL PROPERTIES:

BENDING RADIUS (Installation)	8 x Ø
MAX. RECOMMENDED PULLING TENSION	80 N
NOMINAL OUTER Ø	6.4 ± 0.30 mm
CABLE WEIGHT	39 kg/km
CORE IDENTIFICATION	
Pair colours	1. White/Blue stripe & Blue 2. White/Orange stripe & Orange 3. White/Green stripe & Green 4. White/Brown stripe & Brown
PACKAGING	500 m drum, 1000 m drum
MARINE TYPE APPROVALS	DNV

MAIN CHARACTERISTICS:

FIRE PERFORMANCE	IEC 60332-1 IEC 60332-3-24
HALOGEN FREE	IEC 60754 series
OIL RESISTANCE	IEN 60811-404 - cond. according to EN 50363-10-2
MAX. CONDUCTOR DC RESISTANCE	145 Ω/km @20 °C
CONDUCTOR LOOP RESISTANCE	max. 29 Ω /100 m @20 °C
NOM. MUTUAL CAPACITANCE	≤ 5.6 nF/100m @1kHz
CAPACITANCE UNBALANCE PAIR TO GROUND	≤ 1600 pF/km @1 kHz
MIN. INSULATION RESISTANCE	5000 MΩ x km
IMPEDANCE	100 ± 25 Ω @100 MHz
RATED TEMPERATURE	75 °C
OPERATING TEMPERATURE RANGE	-20 - 75 °C fixed installation

Subject to change without prior notice. See latest update on our webpage.

© 07/2023 Helkama Bica Oy. All rights reserved.

HELKAMA
THE PERFECT CONNECTION

helkamabica.com
customer.care@helkamabica.fi
+358 2 410 8700

CAT 7 PUR

S/FTP 4 PR AWG 26/7

ITEM NUMBERS:

Part number	Cable type	Colour	Standard length
3350149042	CAT 7 S/FTP AWG 26/7 PUR	Black	500 m
3351149042	CAT 7 S/FTP AWG 26/7 PUR	Black	1000 m
---	CAT 7 S/FTP AWG 26/7 PUR	Grey	500 m
---	CAT 7 S/FTP AWG 26/7 PUR	Grey	1000 m
---	CAT 7 S/FTP AWG 26/7 PUR	Yellow	500 m
---	CAT 7 S/FTP AWG 26/7 PUR	Yellow	1000 m
---	CAT 7 S/FTP AWG 26/7 PUR	White	500 m
---	CAT 7 S/FTP AWG 26/7 PUR	White	1000 m
---	CAT 7 S/FTP AWG 26/7 PUR	Orange	500 m
---	CAT 7 S/FTP AWG 26/7 PUR	Orange	1000 m
---	CAT 7 S/FTP AWG 26/7 PUR	Blue	500 m
---	CAT 7 S/FTP AWG 26/7 PUR	Blue	1000 m
---	CAT 7 S/FTP AWG 26/7 PUR	Red	500 m
---	CAT 7 S/FTP AWG 26/7 PUR	Red	1000 m
---	CAT 7 S/FTP AWG 26/7 PUR	Green	500 m
---	CAT 7 S/FTP AWG 26/7 PUR	Green	1000 m

PERFORMANCE:

F (MHz)	ATT (dB/100 m)	RL (dB)	NEXT (dB)	PS NEXT (dB)	ACRF (EL FEXT) (dB/100 m)	PS ACRF (PS EL FEXT) (dB/100 m)	PD (ns/100 m)
4	4.9	32	107	95	117	-	463
8	6.8	32	107	98	107	-	457
10	7.6	35	105	96	100	-	456
16	9.6	34	104	95	116	-	453
20	10.8	43	117	98	106	-	452
25	12.2	40	115	100	103	-	451
31	13.7	39	107	100	108	-	450
62.5	19.7	42	114	102	113	-	447
100	25.1	39	102	100	109	-	446
200	35.9	37	111	104	102	-	445
250	40.1	33	104	99	112	-	444
300	44.3	33	114	101	109	-	444
600	63.9	27	102	93	106	-	443

If FEXT loss is greater than 70 dB, PS ACR-F loss may not be measured

F = Frequency

ATT = Attenuation

RL = Return Loss

NEXT = Near End Crosstalk

PS NEXT = Power Sum Near End Crosstalk

ACRF (EL FEXT) = Attenuation to Crosstalk Ratio Far End Crosstalk

PS ACRF (PS EL FEXT) = Power Sum Attenuation to Crosstalk Ratio Far End Crosstalk

PD = Phase Delay

© 07/2023 Helkama Bica Oy. All rights reserved.

HELKAMA
THE PERFECT CONNECTION

helkamabica.com
customer.care@helkamabica.fi
+358 2 410 8700